THE SOLUTIONS READY

Configurable applicatives directly from HMI

Reduced time in making machine operable and in immition the machine on the market Reduced investment by the OEM in SW development

Not programmer required in making machine operable Possibility
for the
customer
to directly
modify the machine
functionalities











Linear weigher



Auger filler doser




Cups doser



Multihead weigher



Vertical Form Fill Seal Machine (VFFS)

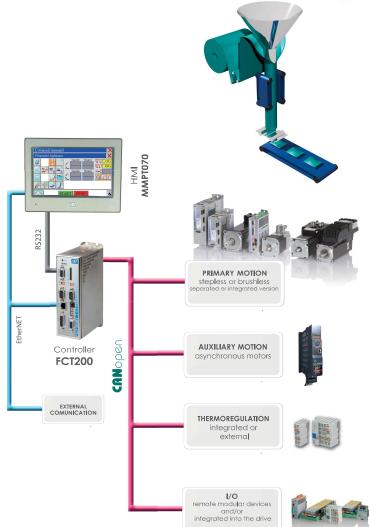

Directly from HMI:

- Configuration of the hardware of the machine
- Configuration of the machine options
- Configuration of the screens
- Tuning of the axes
- Tuning of the thermoregulators
- Monitoring of the fieldbus
- Monitoring of the all the devices

Management of

- -Feeding: control signals of the line, loading belt, master/slave dosing or volumetric, auger filler doser, phasing doser.
- Forming of the package: pulling of the film with one or two motors, unwinder
- Sealing and cutting of the package with pneumatic or motorized crimpers and possibility of square bottom pneumatic or motorized, hot and/or pulse soldering
- Discharge: management of output belt, control signals with the rest of the line